




Installation & Owners Manual

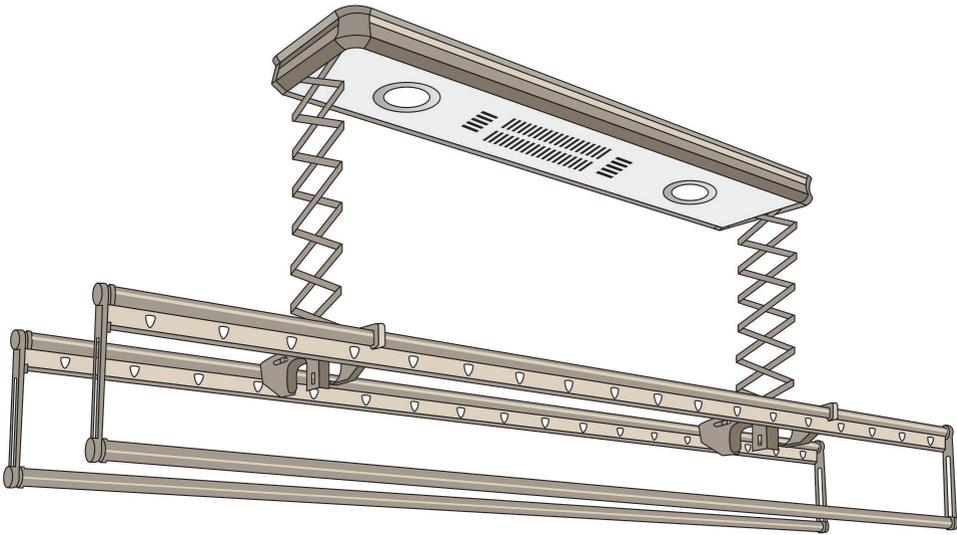

CONGRATULATIONS on the purchase of your
Air-It Multi-purpose remote controlled WASHING LINE / STORAGE LIFT

Warning: It is vital for the safety of all persons installing and using this product to follow the installation instructions and safety warnings. Failure to comply may result in serious personal injury and / or property damage and failure of the product.

COMPONENT CHECK LIST

The following will be in your Air-It box:

1. Host
 2. Sealed Box measuring 17 x 4 x 10cm
 - Folding Support Arm x 4
 - Rawl Bolts x 4
 - Wire Clip Cap x 4
 3. Sealed Box measuring 56 x 4.5 x 25cm
 - Stabilizer Arm & Block x2
 4. Remote Control & Wall Console
 5. Template Marker (at the bottom of the box)
-

INSTRUCTIONS ON HOW TO INSTALL

Please read the Instruction Manual carefully or visit our website www.airitsa.co.za to watch a short video on [how to install Air-it](#).

AIR-IT FUNCTIONS

1. LED lighting

High Tech, energy saving and LED Lighting on both models

2. Cold and warm air-drying function (WASHING LINE model only)

Continuous rainy and wet conditions, the Air-It Washing Line model which features a drier, will provide hot and cold air to assist with drying. The drier will time out after 3 hours.

3. Ultraviolet sterilization (WASHING LINE model)

Continuous rainy and wet conditions, the Air-It Washing Line model will assist killing bacteria with the help of the Ultraviolet lights. These lights will time out after 30 minutes.

4. Multiple protection warning system (WASHING LINE & STORAGE LIFT models)

In the event of overloading (maximum 35kgs), a beeping sound will be heard. In the event of extreme overload, the Air-It will stop moving. This is to protect the inside mechanisms. In both instances you must remove excess weight.

5. Up and down telescopic extension (WASHING LINE & STORAGE LIFT models)

Make sure that the poles, if extended, are free of any hinderances. Always make sure that the wire rope and slot are vertically in line with each other.

INSTALLATION PREPARATION

- Remove all components from the box (see above component check list)
 - Please read the Instruction Manual carefully before installation
 - Make sure to turn off the power supply
 - Make sure a qualified electrician supplies the correct power
 - If there are any fingerprints on the Air-It after installation, please use a damp cloth to remove
 - A template is provided in the box to assist you with marking the holes that must be drilled
- 

INSTALLATION PROCEDURES

- 1 Remove template from box and mark holes to drill into slab or supported ceiling. Refer to 3 below.
- 2 Remove end caps from either side by unscrewing 4 screws.
- 3 The host may be mounted directly onto the concrete roof slab or onto ceiling boards, that are suspended or fixed directly onto the roof structure. If fixed onto ceiling board it is imperative that the installer ascertains that the roof-ceiling boards can hold a minimum weight of 50kgs.
- 4 Fix the HOST onto slab or ceiling (**Do not hang directly from ceiling**). If so, make sure that the ceiling is supported. A pine jamb (114 x 35) will be suitable and is available from any hardware store. A piece of timber mounted onto the trusses or in between the trusses is also suitable.
- 5 Once the host is secured to slab / ceiling, lift the scissored suspension bridge up and connect to host by inserting the nylon rollers into the 2 slots behind the end caps. Once in place connect the circlip (**SEE VIDEO**).
- 6 Connect the Folding Support Arm to the poles (**SEE VIDEO**) and Connect Poles to the Stabilizer Block. Attach the poles to the stabilizer block and tighten screws.
- 7 Connect wire rope to the wire clip making sure the slot is on top and cover with the caps provided.
- 8 Replace the end caps.
- 9 Make sure that the power supply is connected by a qualified electrician. Make sure that the power is off when connecting to the power point. The LED lights are not connected. Remove light covers and plug into the female connections.
- 10 Make sure that the Lifting Cables are in line vertically with the slot (on Host) into which the cable retracts.
- 11 Switch on power and press remote.

KEEP REMOTE AWAY FROM CHILDREN □ DO NOT HANG FROM BARS



AIR-IT SPECS

MODEL	ROUTINE	COLD STERILIZATION	WARM WIND	WARM AIR STERILIZATION
VOLTAGE	220v/50HZ	220V/50HZ	220V/50HZ	220V/50HZ
MOTOR POWER	50W	135W	135W	135W
LIGHTING POWER	12W	12W	12W	12W
FAN POWER	-	30.6Wx2	30.6W x 2	30.6W x 2
WARM WIND POWER	-	-	400W x 2	400W x 2
STERILIZATION LAMP POWER	-	3w x 2	-	7W x 2



www.air-itsa.co.za

Marks Street, Waltloo, Pretoria



Part of the Absolute Group

Tel +27 (0) 12 803 8348



WARNING ⚠
UV LIGHT
DO NOT LOOK DIRECTLY AT LIGHT



WARNING ⚠
ELECTRIC SHOCK RISK



You can help protect the environment!